



An Improved HRC-I Degap


Michael Juda
CXC/SAO



-
1. HRC Position Reconstruction and “Gaps”
 2. Aspect Solution to Detector Location
 3. Deriving Look-up Corrections
 4. Improved Degap Look-up Example
 5. Future Improvements



HRC Fine Position Algorithm

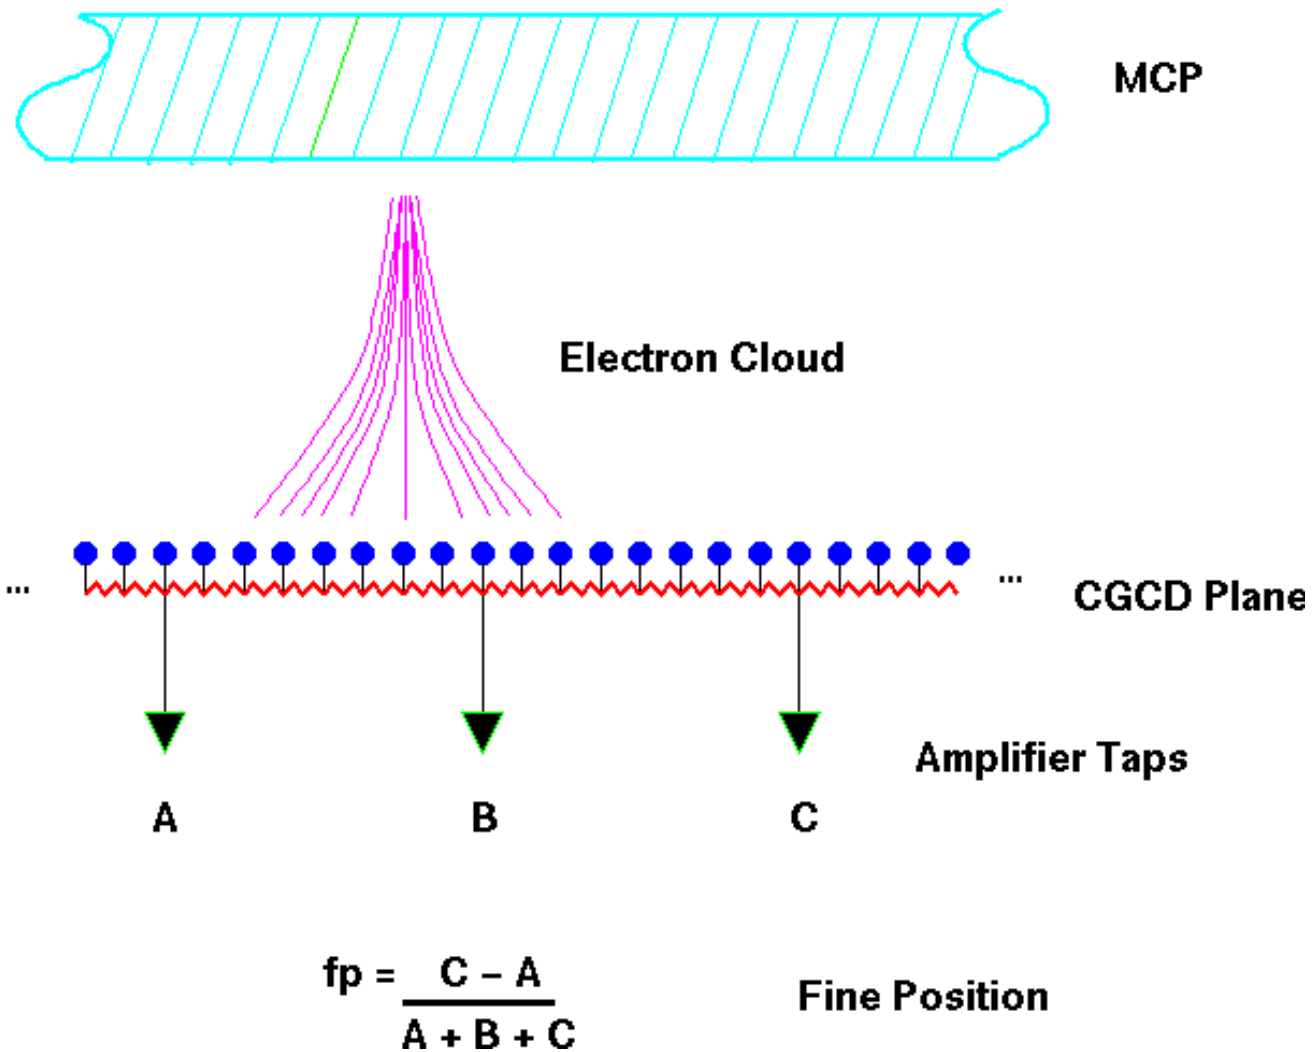



- HRC does not have fixed pixels
- Coarse position (amplifier with “largest” signal) and signal size of this and amplifier to either side is telemetered
 - 60 coarse positions per HRC-I axis
 - Coarse positions are at fixed points in the detector
- Event position on an axis is determined by centroid of charge distribution among three amplifiers
 - Centroid gives a fine position relative to the location of the coarse position of the center amplifier of the triplet
- “RAW” position is given by:

$$\text{RAW} = 256 \times (\text{CRS} + 0.5 + \text{fp})$$



- Fine position is biased toward center tap
 - Three signals lose information as charge cloud moves to the half-way point between coarse positions
 - Loss of information produces gaps in image produced in RAW coordinates
 - Gaps are not due to missing events but due to a systematic mis-location of events
- Mis-match of amplification gains and offsets will also lead to distortions in the RAW coordinates



- Degap correction implemented to remove the bias
 - Old-style correction
$$X_{\text{fine}} = \text{sign}(fp) \times (a_1 \times |fp| + a_2 \times |fp|^2 + a_3 \times |fp|^3 + a_4 \times |fp|^4 + a_5 \times |fp|^5)$$
$$\text{Degapped RAW} = 256 \times (\text{CRS} + 0.5 + X_{\text{fine}})$$
 - New-style correction
$$\text{Degapped RAW} = \text{RAW} + \Delta$$
$$\Delta = \text{value look-up based on RAW}$$


Current Δ 's based on values from old-style correction
- Old-style correction assumes amplifiers are well-matched:
 - $fp = 0$ is at the center of the coarse position
- New-style correction can account for amplifier mis-match



- Aspect solution used in pipeline to determine sky position for all events
 - Remove spacecraft dither
 - Determine absolute pointing
- Work backward with aspect solution to determine the path a near-on-axis source traces on the detector
 - Assume dither averages away small scale deviations




- Point source location determined relative to nominal “on-axis” position
- Combine with nominal roll to get radial offset and position angle relative to on-axis in “detector” coordinates

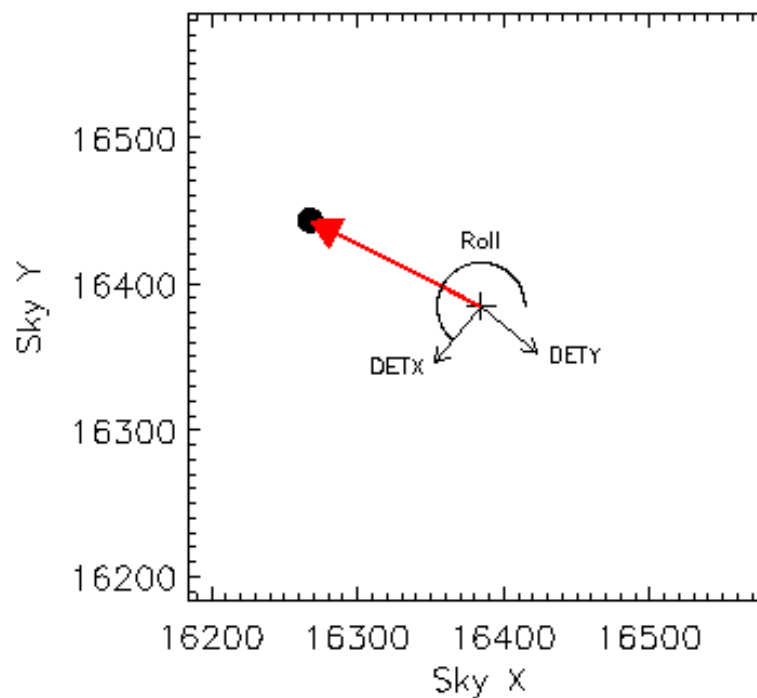




- From aspect solution get RA & Dec offsets relative to nominal pointing *vs* time
- Combined with source position offset gives dither path of source in “detector” coordinates

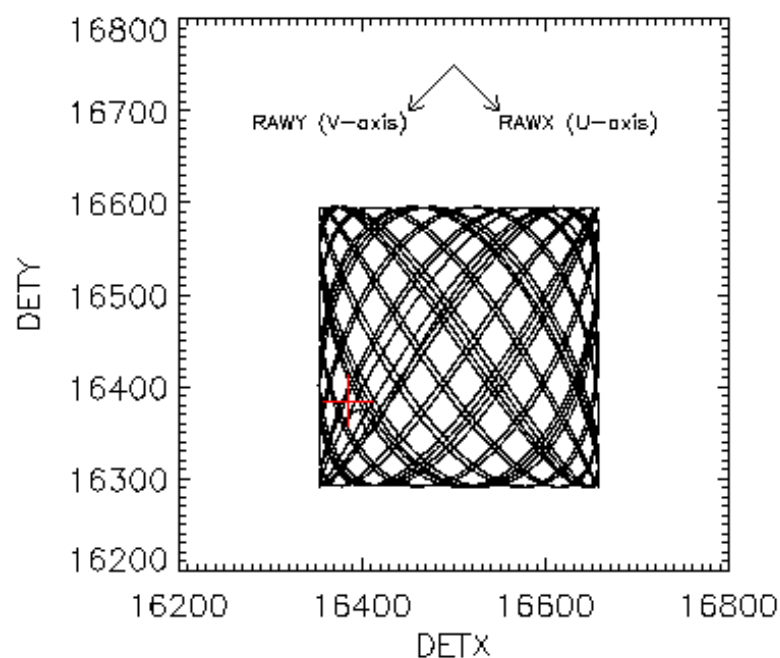




- HRC-I is rotated relative to the DET coordinate system
- SIM-Z position offset will move nominal aim-point on HRC-I, as will “bending” of the optical bench
- Dither path can be rotated and translated into HRC-I coordinates
- Source position modeled for each event time

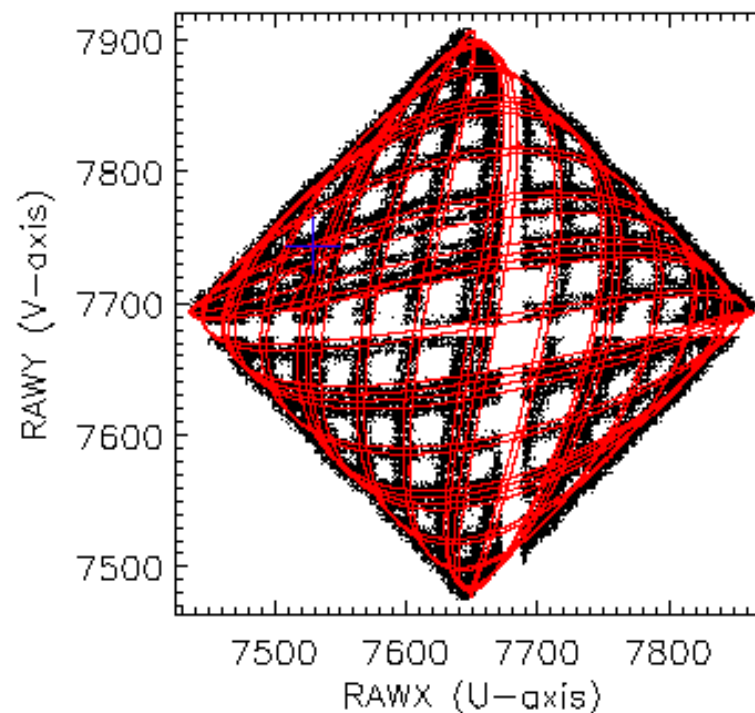



- Point sources within 3 arcmin of on-axis
 - Bright enough/long enough for good statistics
- Select source events in a ~ 1 arcsec radius
- For each event use aspect to model location of source on HRC-I
- For all events at a given modeled location along an axis determine the mean RAW coordinate for each of the three AMP_SF values

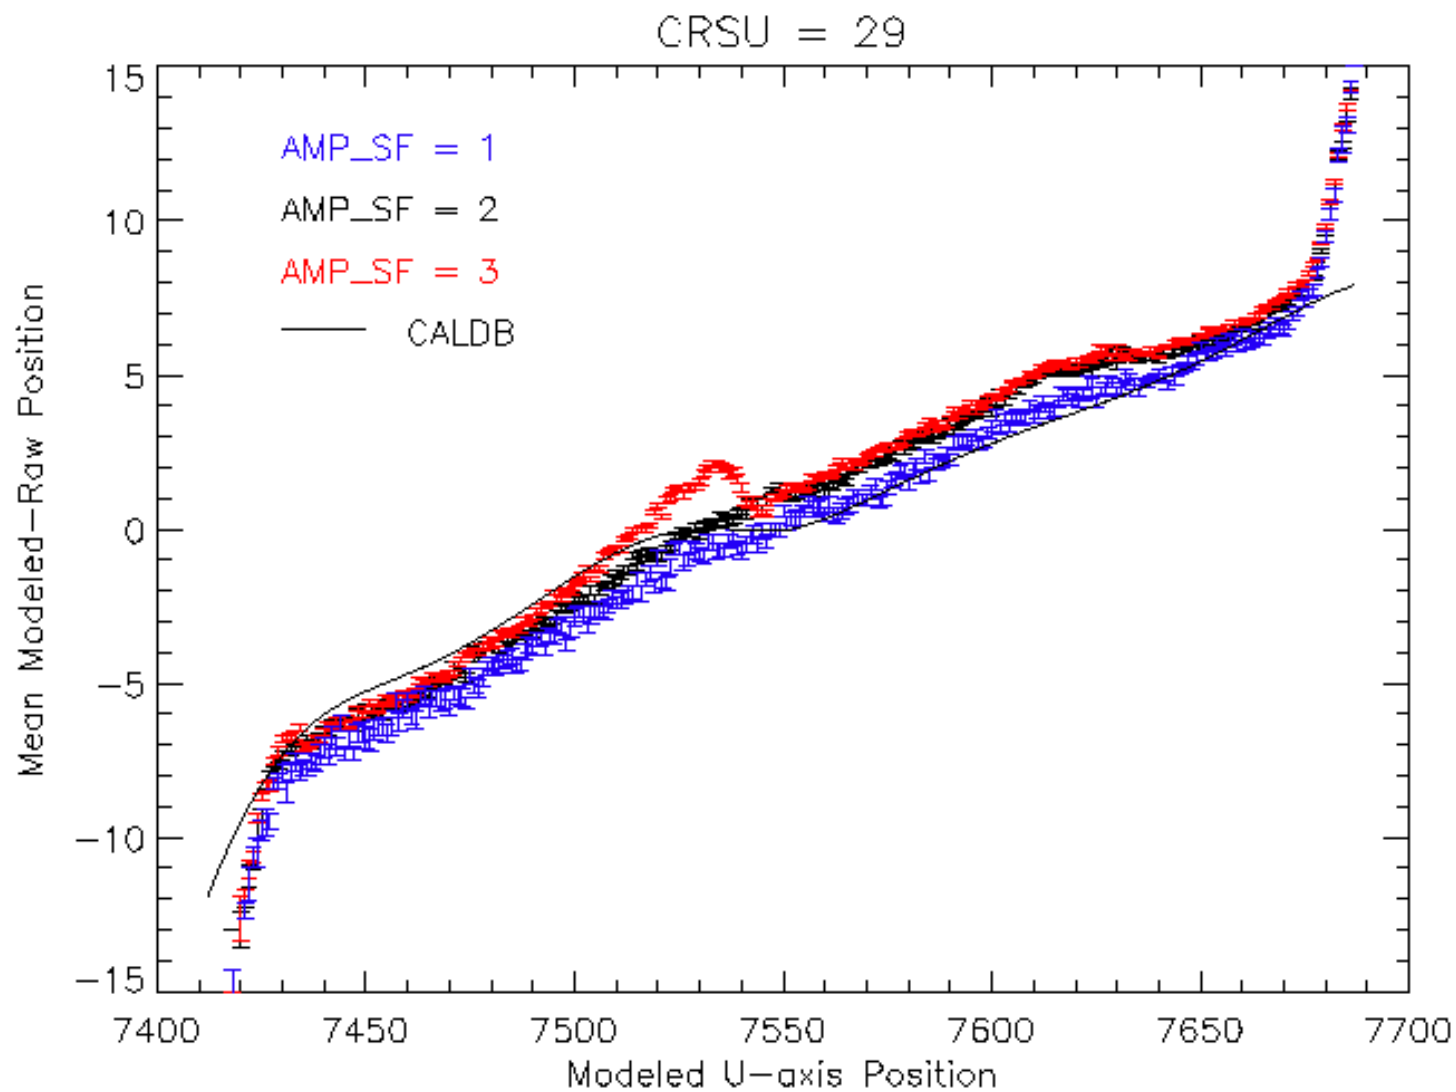




- Deviation between Mean RAW position for a given Modeled position and the Modeled position provides the basis for the look-up correction
 - Degap correction must be referenced to the RAW position rather than the Modeled position to allow for look-up
 - (Modeled position-deviation, deviation) pairs are interpolated into (RAW, degap correction) pairs for the look-up table





Derived Degap Example

CXC

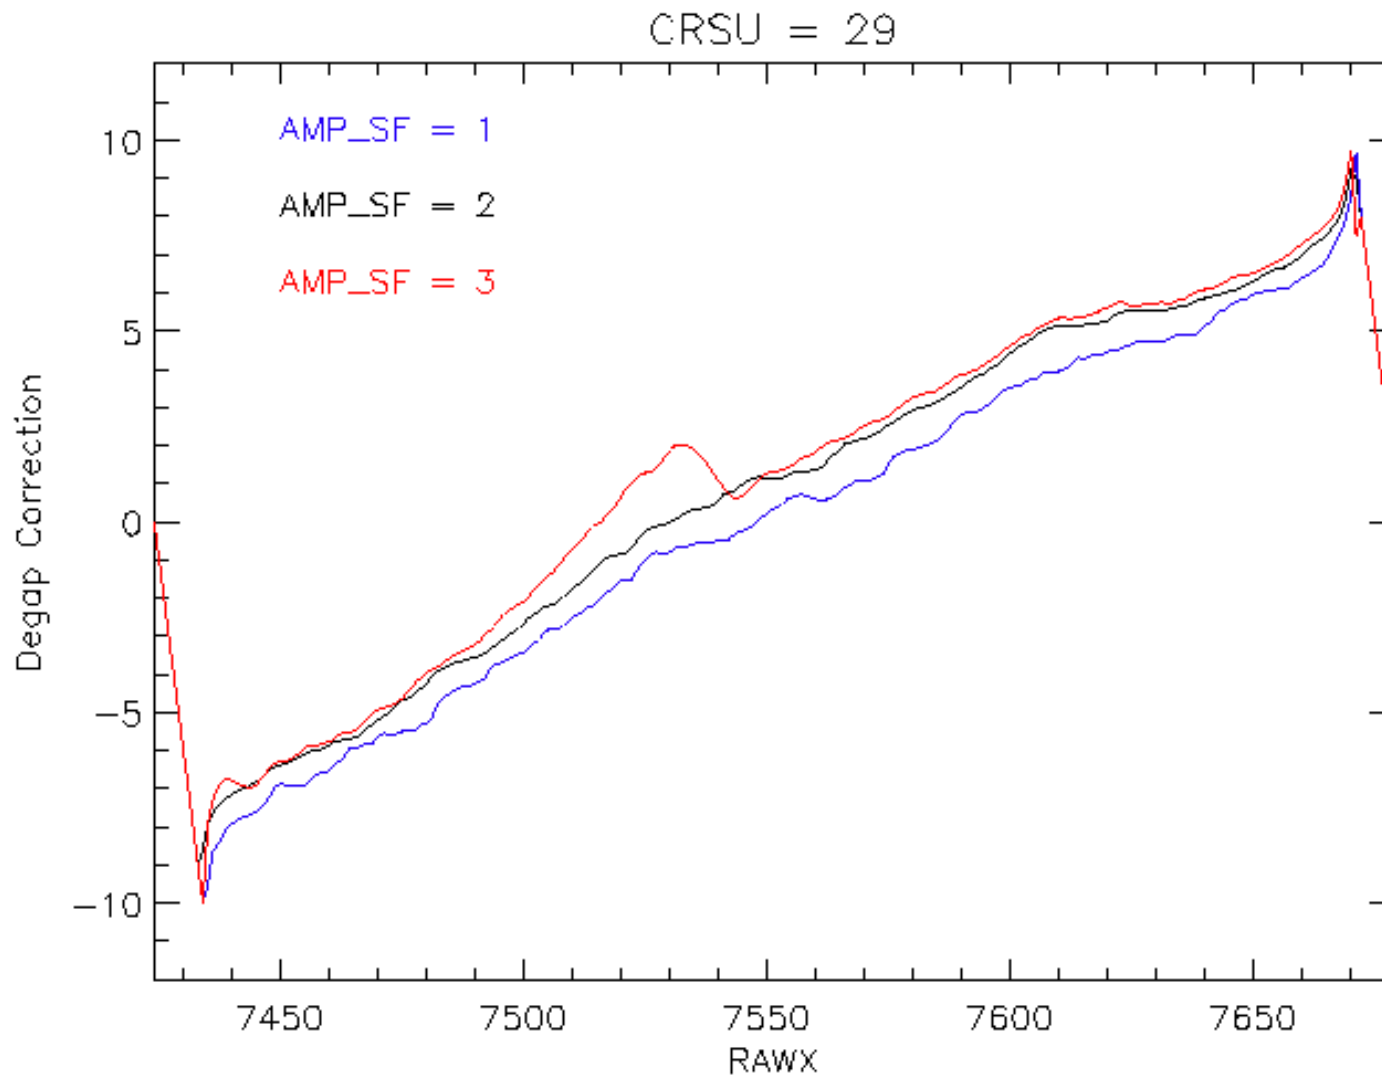



- Events taken from several bright on-axis sources
 - Some used zero-order from LETG (HZ 43, Cyg X-2)
 - Some used non-zero SIM-Z offset (GX13+1, Cyg X-2)
- Events taken from AR Lac offset scans for gain variation
- Counts over portions of ~ 15 coarse positions per axis
 - Coverage gaps due to available sample of sources
 - Count statistics quite variable in covered regions

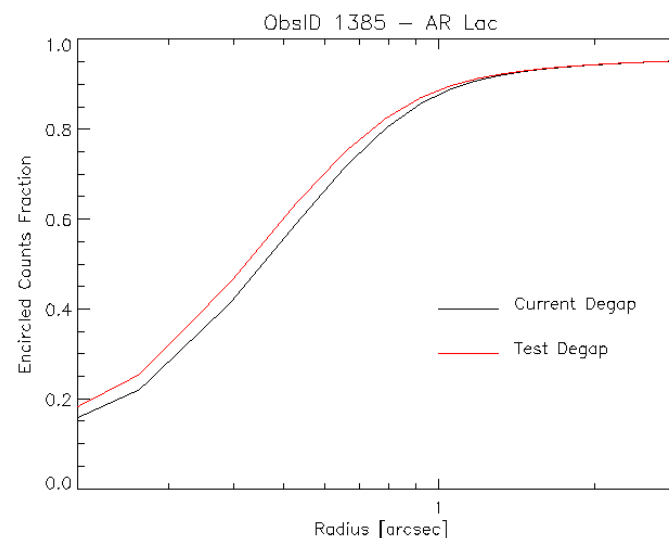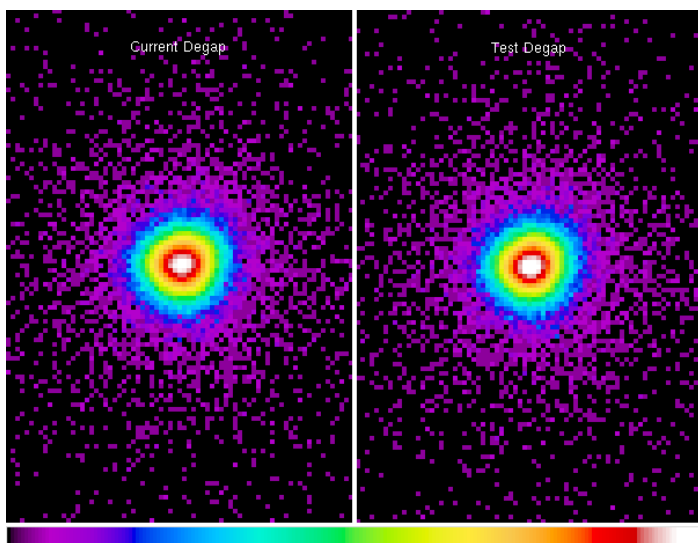

- Derive values for lookup table of degapping corrections via described method where adequate statistics are available
 - Use corrections derived from old-style polynomial in all other places
 - AMP_SF columns may be updated for only one or two of the values over some ranges
- Reprocess using CIAO tool `hrc_process_events` and apply standard filtering
- Standard deviation of source events decreases by ~5%
- No obvious distortions introduced in the limited number of ObsIDs tested



- Dedicated set of observations to map deviations across the span of the HRC-I
 - Capella as source - expect ~ 15 counts/s
 - Total of ~ 40 observations with SIM at different translation offsets
 - 3 mm translation step to provide overlap in dither pattern
 - With planned overlap 5ks per observation will provide good statistics for all three AMP_SF
 - First set of 20 observations in the next year cover central region of HRC-I and large SIM-Z offset region used for GX13+1